


DECLARATION

Thermal transmittance for the center of the trap door in all loft ladders
with the trap door thickness of 86mm.

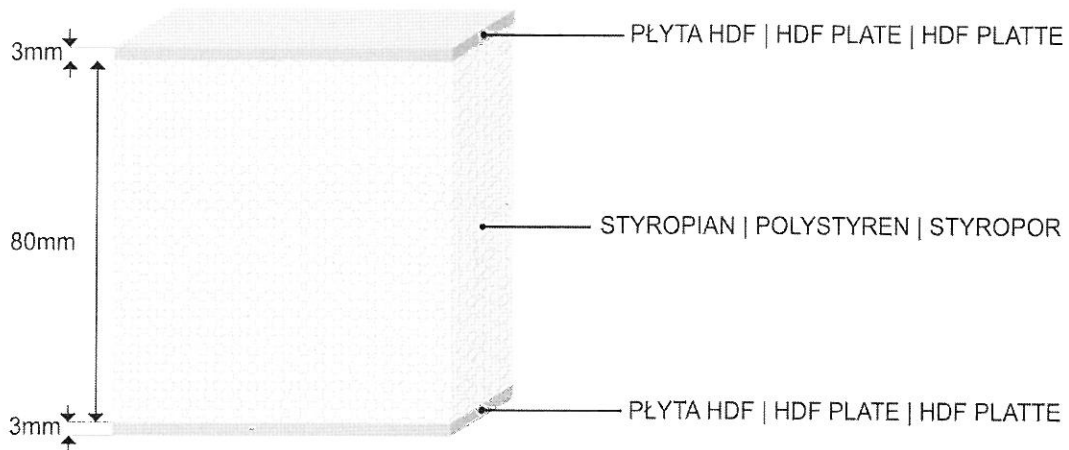

Thermal transmittance factor of the polystyrene- foamy polystyrene $\lambda_{\text{polystyrene}}=0,031 \text{ W/(mK)}$

Thermal transmittance factor of the hard fibreboard $\lambda_{\text{hdf}}=0,18 \text{ W/(m}\cdot\text{K)}$

Thermal resistance for the partition

- for the polystyrene

$$R_{\text{polystyrene}} = \frac{d_{\text{polystyrene}}}{\lambda_{\text{polystyrene}}} = \frac{0,08}{0,031} = 2,58 \frac{\text{m}^2 \cdot \text{K}}{\text{W}}$$

- for the fibreboard

$$R_{\text{hdf}} = \frac{d_{\text{hdf}}}{\lambda_{\text{hdf}}} = \frac{0,003}{0,18} = 0,017 \frac{\text{m}^2 \cdot \text{K}}{\text{W}}$$

Thermal resistance-absorption:

$$R_{\text{si}} = 0,10 \frac{\text{m}^2 \cdot \text{K}}{\text{W}}$$

$$R_{\text{se}} = 0,04 \frac{\text{m}^2 \cdot \text{K}}{\text{W}}$$

Thermal transmittance factor k_0 for the partition wall without thermal bridges

$$U = \frac{1}{R_{\text{si}} + R_{\text{hdf}} + R_{\text{polystyrene}} + R_{\text{hdf}} + R_{\text{se}}} = \frac{1}{2,754} = 0,363 \frac{\text{W}}{\text{m}^2 \cdot \text{K}}$$

OMAN Sp. z o.o. ul. Zamkowa 11, 47-400 Racibórz, Poland
tel. +48 32 419 85 00, www.oman.eu
NIP 6391873987 (22)